XT3303

GaAs MMIC 6-BIT DIGITAL PHASE SHIFTER
2.2～2.6GHz

Rev 2.0

Features

- Frequency：2.2～2.6GHz
- RMS of Phase Accuracy：0.8°
- Low Insertion Loss：4.5dB
- Positive Voltage Control
- Die Size：3.1mm×1.25mm×0.1mm

Typical Applications

- EW
- Military Radar and Weather Radar
- SATCOM
- Beamforming
- Phase Cancellation

General Description

XT3303 is a 6-bit digital phase shifter which works from 2.2 to 2.6GHz, providing 360 degrees of phase coverage with a LSB of 5.625 degrees.

XT3303 features very low RMS phase error of 0.8 degrees and extremely low insertion loss variation of ±0.5 dB across all phase states. This high accuracy phase shifter is controlled with positive control voltage of 0/+5V.

Functional Diagram

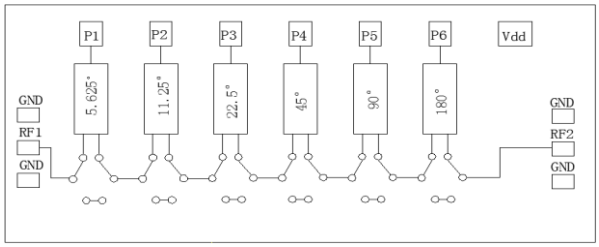

Electrical Performance (T_A=+25℃ , V_D=-5V,Control Voltage=0/+5V,Z_O=50Ω)

Parameter	Min.	Typ.	Max.	Units
Frequency		2.2～2.6		GHz
Input VSWR	—	1.3	—	:1
Output VSWR	—	1.3	—	:1
Insertion Loss	—	-4.5	—	dB
IL Variation	-0.5	—	0.5	dB
Phase Accuracy	-1	—	1	°
RMS of Phase Accuracy	—	0.8	—	°

Truth Table (0 : 0V , 1 : +5V)

Phase	P1	P2	P3	P4	P5	P6
REF	0	0	0	0	0	0
-5.625°	1	0	0	0	0	0
-11.25°	0	1	0	0	0	0
-22.5°	0	0	1	0	0	0
-45°	0	0	0	1	0	0
-90°	0	0	0	0	1	0
-180°	0	0	0	0	0	1
-354.375°	1	1	1	1	1	1

Chengdu Fairchild Technology Co., Ltd.
Add.: 4F, Block B, No.98 Tiancai road, Hi-Tech(West)Zone, Chengdu.
Cel.: 18381641733 Tel.: +86-28-8792 9948, +86-28-8793 2498 Fax: 028-8793 3348
E-mail: sales@fairchild-tech.com. Web.: www.fairchild-tech.com
WeChat: R18381641733.

Typical Performance Curve

Input VSWR(:1)

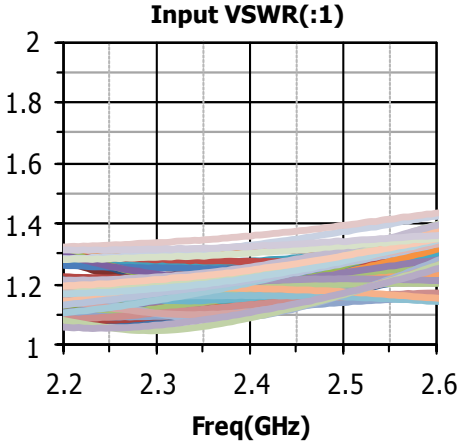

Output VSWR(:1)

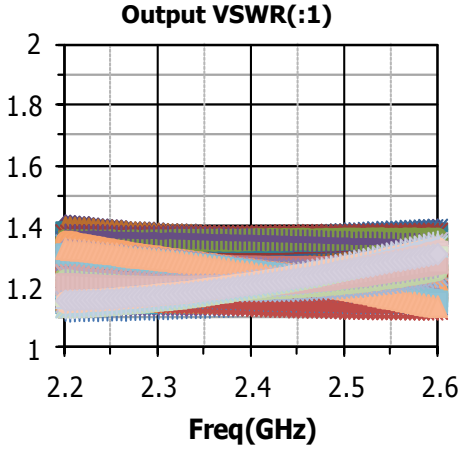

Insertion Loss(dB)

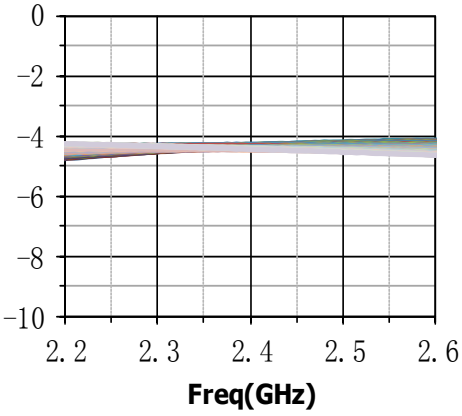

IL Variation(dB)

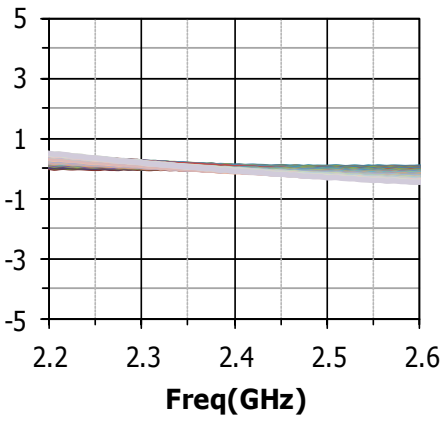

Phase Accuracy(°)

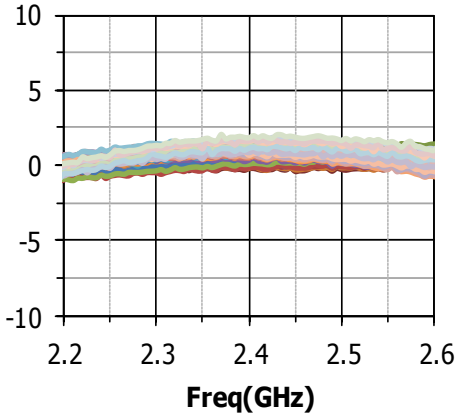

RMS of Phase Accuracy (°)

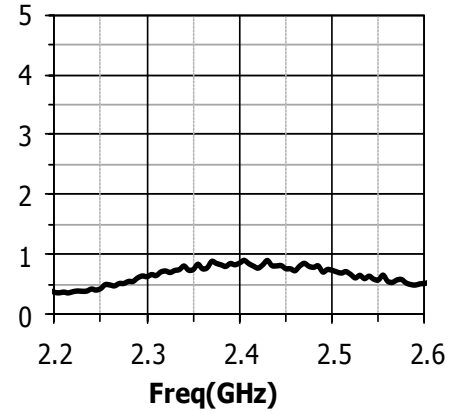

Absolute Maximum Ratings

Maximum Input Power	+23dBm	Operating Temperature	-55℃～+85℃
Maximum Input Voltage	-8V	Storage Temperature	-65℃～+150℃

Control Voltage

State	Bias
Low	0~ 0.2V
High	4.5~ 5.5V

Power Supply

V_D	I_D
-5V	8mA

Die Outline
(all dimensions in mm)

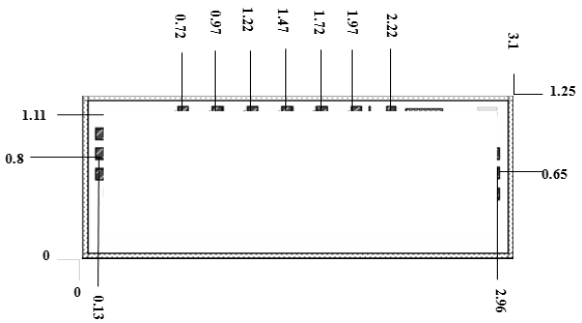

Assembly Diagram

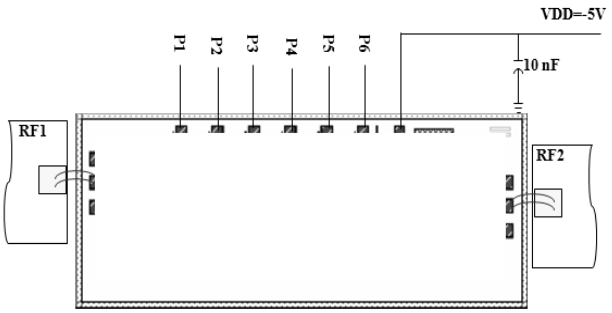

Attention:

GaAs MMIC devices are susceptible to damage from electrostatic discharge. Proper precautions should be observed during handling, assembly and test.

Chengdu Fairchild Technology Co., Ltd.
Add.: 4F, Block B, No.98 Tiancai road, Hi-Tech(West)Zone, Chengdu.
Cel.: 18381641733 Tel.: +86-28-8792 9948, +86-28-8793 2498 Fax: 028-8793 3348
E-mail: sales@fairchild-tech.com. Web.: www.fairchild-tech.com
WeChat: R18381641733.